



SPECIFICATIONS

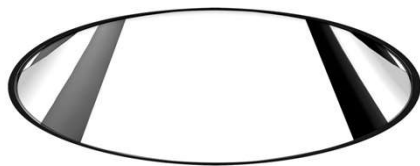

base code	ENA S
typology	Trimless Recessed LED downlight luminaire, Installation frame included.
construction	Aluminum Die Cast
reflector finish	Gold (G), Black High Gloss (BG), Silver High Gloss (SG), White (W), Black Matt (BM), Chrome (C)
trim finish	Black (B) / White (W)
lamp wattage	8.5W
delivered lumens	830lm / 860lm / 870lm
CCT	2700K / 3000K / 4000K
beam	40°
binning	< 3
CRI	> 90
life	50.000h
IP	IP20
special features	The reflectors are fixed by a magnet and can be replaced easily. Variable combination between single, double, triple, quadruple can be made using specific installation frames as shown below
dimming options	Phase-cut Dim, 0-10V, DALI, CASAMBI, Dim to Warm. Power supply to be ordered separately

Base code	A. Wattage	B. Kelvin	C. Beam
ENA S	08 - 8.5 W	27 - 2700K 30 - 3000K 40 - 4000K	W - 40°
Base code A B C D E			
Example: ENA S - 08 30 W G-B DA = ENA S - 08 30 W G-B DA			
D. Reflector & Trim finish		E. Dimming option	
G-B	G-W	ND - Non Dim	
BG-B	BG-W	PC - Phase-cut	
SG-B	SG-W	AD - Analog	
W-B	W-W	DA - Dali	
BM-B	BM-W	D2 - Dali 2	
C-B	C-W	WD - Dim to warm	
		CS - Casambi	

dimension



installation frames

